

WORK TO BE DONE BY LADOT:

1. LENGTH OF DESIGN : 2900' ±
2. LADOT SHALL REMOVE / INSTALL STRIPING, PAVEMENT MARKINGS, CURB MARKINGS, AND SIGNS. SEE DETAILS D, E, AND F FOR PARKING STALL DETAILS.
3. 6" / 4" WHITE X 4' STRIPE WITH 8" GAP
4. 8" WHITE X 3' STRIPE WITH 12" GAP
5. LADOT SHALL FURNISH, REMOVE AND INSTALL ALL PARKING METER HEADS.
6. PAINT REMOVAL REQUIRED.



WORK TO BE DONE BY CONTRACTOR:

7. CONTRACTOR SHALL REMOVE PARKING METER POSTS AND FOUNDATIONS AT ALL BACK-IN PARKING STALL LOCATIONS.
8. CONTRACTOR SHALL INSTALL PARKING METER POSTS AND FOUNDATIONS PER LADOT STANDARD DWG. S-410.4.1, S-410.4.2, AND S-410.4.3 AT ALL BACK-IN PARKING STALL LOCATIONS (EXCEPT FOR HANDICAP/ACCESSIBLE STALLS) AND AT ONE (1) PARALLEL PARKING STALL WEST OF ROYER AVE (NORTH SIDE OF VENTURA BL).
9. CONTRACTOR SHALL CONTACT THE LADOT PARKING METER ADMINISTRATOR AT (213)473-8270 WITHIN TEN (10) WORKING DAYS PRIOR TO START OF CONSTRUCTION. THE CONTRACTOR SHALL FOLLOW PARKING METER FOUNDATION STANDARDS AS PROVIDED BY THE LADOT PARKING METER ADMINISTRATOR. THE CONTRACTOR SHALL OBTAIN MARKOUT APPROVAL PRIOR TO INSTALLATION OF PARKING METER POSTS. SEE DETAIL H.
10. CONTRACTOR SHALL INSTALL POST AND FOUNDATION FOR COMMERCIAL LOADING ZONE.
11. CONTRACTOR SHALL FURNISH AND INSTALL 6"x6"x6'L WHEEL STOPS (BLACK & WHITE), AS SHOWN ON PLANS. SEE DETAIL G.

14. CONTRACTOR SHALL FURNISH AND INSTALL 4"x6"x6'L WHEEL STOPS (BLACK & YELLOW), WITH 4" GAPS.
15. CONTRACTOR SHALL FURNISH AND INSTALL 4"x6"x6'L WHEEL STOPS (BLACK & WHITE), WITH 4" GAPS.

LEGEND

1. [Symbol] EXISTING STRIPING & MARKINGS TO REMAIN
2. [Symbol] EXISTING STRIPING & MARKINGS TO BE REMOVED
3. [Symbol] PROPOSED STRIPING & MARKINGS
4. [Symbol] EXISTING SIGNS
5. [Symbol] PROPOSED SIGNS
6. [Symbol] SIGNALIZED INTERSECTION
7. [Symbol] EXISTING RED CURB
8. [Symbol] PROPOSED RED CURB
9. [Symbol] EXISTING FIRE HYDRANT
10. [Symbol] PROPOSED INTERNATIONAL SYMBOL OF ACCESSIBILITY (ISA), SEE DETAIL C
11. [Symbol] PEDESTRIAN-ACTUATED OR HYBRID BEACON INTERSECTION
12. [Symbol] PROPOSED WHEEL STOP
13. [Symbol] GREEN PAVEMENT MARKINGS ("HOLLYWOOD GREEN" PANTONE 349C)

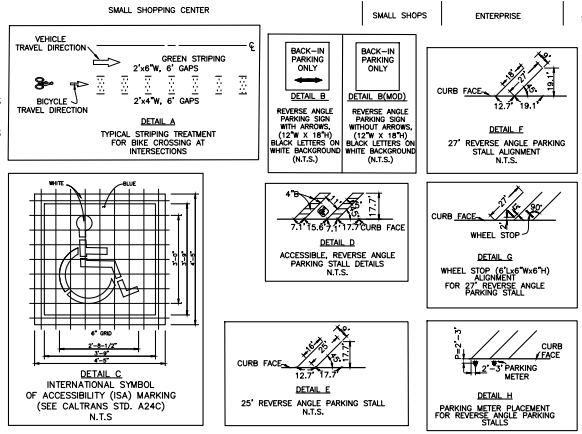

SCALES
HORIZ. 1" = 40'
VERT. 1" = 20'

SCALE: 1" = 40'

REIMAGINE VENTURA PROJECT - PHASE 1
VENTURA BLVD FROM W/O ROYER AVE TO E/O SALE AVE
ALT. B-1

SUBMITTED: December 22, 2020
APPROVED: December 23, 2020
Submitted by: [Signature]
Approved by: [Signature]
Transportation Engineer
Senior Transportation Engineer

INSTALLATION DATES
MARKOUT BEGAN:
MARKOUT COMPLETED:
STRIPING COMPLETED:
References:

CITY OF LOS ANGELES
DEPARTMENT OF TRANSPORTATION
SELETA J. REYNOLDS, GENERAL MANAGER

VENTURA BOULEVARD: PHASE 1
W/O ROYER AVE. TO E/O SALE AVE.

Thomas Guide District
559, G3-H3 WV

PROJECT NO. PRC19002
DRAWING NO. A-7904
SHEET 1 OF 2

SHEET

INDEX NUMBER

STOP R1-1	SPEED LIMIT 35 R2-1
RIGHT LANE ENDS W9-1	LANE AHEAD NARROWS W4-2
BIKE LANE R81(CA)	ONLY R3-5
W1-2	PARKING ONLY MINIMUM LINE S230 R99C (CA)

DATE	BY	DATE	BY	DATE	BY
11-17-20	MM	11-17-20	MM	11-17-20	MM
DATE	BY	DATE	BY	DATE	BY
11-17-20	MM	11-17-20	MM	11-17-20	MM

NO.	REVISION DESCRIPTION	DATE

